

**JMC** **N 800**  
GVW 5000 / 7500Kg

**LEADER IN CHINA HIGH END  
LIGHT TRUCK MARKET**



**150PS**  
Max Power

**382Nm**  
Flat Torque

**UNECE**  
REGULATION  
COMPLIANT

**FIRST  
IN  
CLASS**



**SPACIOUS & COMFORTABLE CABIN SPACE**



**6 SPEED TRANSMISSION**



**AIR-BRAKE**

**HIGHLIGHTED FEATURES**

# JMC N800 Specification

MODEL	JX105A	JX105
<b>ENGINE</b>		
Engine model	JX4D30A4H	
Engine Type	In-line, Water cooled, 4 stroke, 4 valve, DOHC, Turbocharged	
Engine Type	Inter cooler, common rail	
Displacement (cc)	2892	
Emission Standard	EURO IV	
Fuel Standard	Diesel	
Fuel Tank Capacity (L)	100	
Max Output (kW[HP]/rpm)	112(150)/2800	
Torque (Nm/rpm)	382/1600-2800	

<b>TECHNICAL DIMENSION</b>				
Overall Length x Width x Height (mm)	5995 x 2030 x 2344		6878 x 2260 x 2384	
Wheelbase (mm)	3360		3815	
Thread (Front / Rear) (mm)	1585 / 1530		1680 / 1640	
Min Running Ground Clearance	169		168	
Gross Vehicle Weight (kg)	5000	7000	5000	7000
Curb Weight (kg)	2600		2730	
Tire Size	7.00R16 12PR	7.50R16 14PR	7.00R16 12PR	7.50R16 14PR
Turning Radius (m)	6.75		7.25	

<b>DRIVING SYSTEM</b>	
Transmission Type	Manual 6-speed
Drive Axle (Main Reduction Ratio)	4.875
Brake Type	Drum Air Brake with Load Sensing Proportional Valve (LSPV)
Suspension Type (Front / Rear)	Front 8 leaf spring, rear 7 + 7

<b>ELECTRICAL</b>	
Battery	12V
Alternator	14V 110A

<b>FEATURES &amp; ACCESSORIES</b>		
Audio	Radio + AUX + CD + USB	
Adjustable Steering Wheel	•	•
Power Steering	•	•
Tilt Cabin	•	•
Air Conditioner	•	•
Remote Control Central Locking with Alarm	•	•
Power Window	•	•
Beacon Light	○	•
Air Pump Brake	•	•
Sun Roof	○	•
Central Glove Box	○	•


## ENGINE PERFORMANCE



**EURO 4**  
TURBO INTERCOOLER

- Bosch's high pressure common rail fuel injection
- Reasonable light-weight design
- Efficient low-emission design


**OUTPUT (kW[HP]/rpm) : 112(150)/2800**  
**TORQUE (Nm/rpm) : 382/1600-2800**

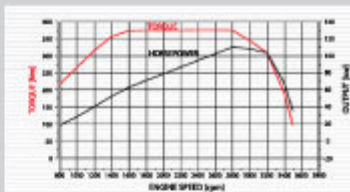

## TRANSMISSION

- Getrag six-speed aluminium alloy gear box

TRANSMISSION		GEAR RATIO						
		1	2	3	4	5	6	R
JX105A	6 SPEED MANUAL	5.979	3.434	1.862	1.297	1.000	0.759	5.701
JX105	(6MT420)							



<b>DIMENSIONS</b>			JX105A	JX105
Wheelbase	WB	mm	3360	3815
Cab Length	CL	mm	5995	6878
Cab Width	CW	mm	2030	2260
Cab Height	CH	mm	2249	2289
Front Overhang	FOH	mm	1125	1155
Rear Overhang	ROH	mm	1510	1908
Front Track Width	FTW	mm	1585	1680
Rear Track Width	RTW	mm	1530	1640
Est Body Length		mm	4400	5050



<b>WHEELBASE MODIFICATION</b>			JX105A	JX105
Standard	mm		3360	3815
Option 1	mm		3815	4800
Option 2	mm		4800	—

\* Modification requirement may vary upon JPJ regulation compliance



**C.A.M. CHINA AUTO MANUFACTURERS (M) SDN BHD**  
(100% MNC)  
 CONSISTENT | ACTIVE | MODERN  
 Sendok Group Building, Lot 1564, Batu 4, Jalan Kapar, 42100 Klang, Selangor Darul Ehsan, Malaysia  
 Tel: +603-3345 9800 Fax: 603-3291 9668 Email: info@sendokgroup.com Sendok Group

Disclaimer: All features & specifications shown in this brochure are subject to change without prior notice and may vary according to locality. The colour(s) of the vehicle(s) and the tractor colour /brand may slightly differ from actual vehicle.

Authorised Dealer: