

15 18 WINDOW VAN

Best in Value

Versatile & Practical

Dual Sliding Door

Powerful 3.0L CDTi Engine

STYLING











Operation Central With Spacious Cabin







INTERIOR









Wide Opening Sliding Door

POWERTRAIN


GREEN DIESEL ENGINE EURO III

DISPLACEMENT	3.0L 110 (148)/3400		
RATED OUTPUT (kW(HP)/rpm)			
MAX TORQUE (N.m/rpm)	370/2000		
COMPRESSION RATIO	17.3:1		




HIGH CAPACITY TURBO CHARGER

To achieve the maximum power & torque by lower engine capacity and hence improve fuel efficiency

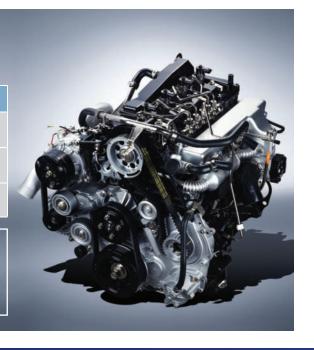

DK5 ENGINE

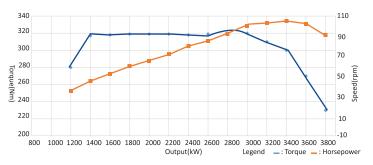

TRANSMISSION		GEAR RATIO					
		1	2	3	4	5	R
3.0L	5 SPEED MANUAL	4.313	2.330	1.436	1.000	0.838	4.220

SAFETY



Head Collision



Rear Collision



Rollover Test



Lateral Static Pressure





Electronic type ABS: ABS (Anti-lock Brake System) can protect the wheel being locked or slipped to ensure the valid braking under different ground conditions

EBD (ELECTRONIC Brake force distribution):

It can detect, automatically, the load of front and back wheel, rotation differences, or wheel locking by electronic means, and distribute ideal brake forces at proper time.





Monocoque type vehicle body:

1. High-strength swaybars 2. Buffer beams

Dual Air Bag

The purpose of the airbag is to provide a vehicle occupant with soft cushioning and restraint during a collision. It can reduce injuries between the flailing occupant and the interior of the vehicle





Specification





ENGINE		
Engine	DK5	
Engine Type	In Line 4 Cyclinder Commonrail Turbo Charge With Intercooler Diesel Engine,EGR.	
Bore x Stroke	96 x 103	
Emission Standard	Euro III	
Displacement (L)	2.982L	
Rated Output (kW(HP)/RPM)	110(148)/3400	
Max. Torque (N.M/R.P.M)	370/2000	
Compression Ratio	17.3:1	
Top Speed *	135 km/h	
Fuel Standard	Euro-III Diesel or Above	
Fuel Tank Capacity (L)	70 Litre	

DRIVING SYSTEM	
Transmission Type	Manual 5-Speed
Gear Ratio	1st: 4.313, 2nd: 2.330, 3rd: 1.436, 4th: 1.000, 5th:0.838, Peverse: 4.220
Clutch	Single Disc, Hydraulic Control
Driving Type	Front Engine, Rear Drive
Brake System	ABS+EBD, Intelligent Brake Assisance System
	Front Disc & Rear Drum
Suspension	Front Transverse Double Wishbone

Independent Suspension, Rear 4 Ply Leaf Spring

TECHNICAL DIMENSION				
Overall LxWxH (mm)	5470 x 1885 x 2285	5998 x 1885 x 2285		
Wheelbase (mm)	3110	3720		
Ground Clearance (mm)	1	69		
Gross Vehicle Weight (kg)	3500	4000		
Curb Weight (kg)*	2415	2680		
Seating Capacity	15 Seats	18 Seats		
Tire	205R/15C	215/75R16C		
Minimum Turning Radius (m)	12.2	14.5		

Minimum Turning Radius (m)	12.2	14.5			
FEATURES AND ACCESSORIES					
Audio Systems	Display Audio With 7 Touch So	reen LCD, MP3, USB, AUX & Bluetooth			
Stereo Speaker	6 pcs				
Reverse Camera	•	•			
Reverse Sensor	•	•			
Cabin Light	•	•			
Seat Material	Black I	PU & Lint			
Last Row Hanging Seat	•	•			
Intermittent Front Wiper, Rear Wiper	•	•			
Rear Windscreen with Demister	•	•			
Tiltable Steering Wheel	•	•			
Central Locking	•	•			
Remote Control	•	•			
Side Mirror with LED Turning Signal Lamp	•	•			
Side Mirror Adjustment	Power				
High-Mounted 3rd Brake Lamp	•	•			
Projection Headlamp with DRL	•	•			
Front Fog Lamp	•	•			
Wheel Size	15" Alloy	16" Alloy			
Air-Conditioner - Front	•	•			
Air-Conditioner - Rear	6 Air Vents	9 Air Vents			
Rear Evaporator	Double				
Middle Console Box with 3 Cup Holder	•	•			
Luxury PVC Roof Lining	•	•			
Side Window	4 Sliding				
PVC Floor Mat	•	•			
Power Window - Driver & Co-driver	•	•			
Anti-Glare Rear View Mirror	•	•			
Seat Belt	•	•			

*Data collected under testing conditions. The final results may differ due to different driving conditions, overall vehicle weight etc.















COMFORTABLE PEOPLE TRANSPORTER



PRIVATE LIMOUSINE



HIRE & DRIVE





BAS **PERSIARAN**






WHEELCHAIR LIFT







Model	Overall Length	Wheelbase (W/B)	FOH	ROH
KINGO	5470mm	3110mm	1250mm	1110mm
KINGO PLUS	5998mm	3720mm	1190mm	1088mm

Branch / Dealer Chop

150,000KM WARRANTY



R&A MARKETING SDN BHD

CONSISTENT | ACTIVE | MOBILE Sole Distributor of King Long Minivan

Sendok Group Building,Lot 1564, Batu 4, 42100 Klang, Selangor Darul Ehsan, Malaysia. Email: info@sendokgroup.com Tel: +603-3345 5600 Fax:+03-3291 9658









Disclaimer: All features & specification shown in this brochure is subject to change without prior notice and may vary according to locality. The color(s) of the vehicle(s) and interior shown here in may slightly differ from actual vehicle.