

KINGO

15 SEATER VAN



EVERYTHING A BUSINESS NEEDS

Best In Value ■ Versatile & Practical ■ Dual Sliding Door



DISPLACEMENT	2.5 L
RATED OUTPUT (kW/HP/rpm)	85(114)/3800
MAX TORQUE (N.m/rpm)	280 / 1800 -2600
COMPRESSION RATIO	17.3:1

2.5L In line 4 Cylinder DOHC 16 Valve
Common-rail, Turbo-charged,
Intercooler, Diesel Engine

DRIVING



STYLISH AND COMFORTABLE 15 SEATER



- Simplified Operation Central
- Middle Console Box*
- Power Window / Central Locking
- Wide & Spacious
- Fully Upholstered Interior
- 5 Doors Access Vehicle

travel with style



interior



*Available in KINGO FULL SPEC only

GREEN DIESEL ENGINE EURO IV JAPANESE TECHNOLOGY


DISPLACEMENT	2.5 L
RATED OUTPUT (kW(HP)/rpm)	85(114)/3800
MAX TORQUE (N.m/rpm)	280/1800-2600
COMPRESSION RATIO	17.3:1



HIGH CAPACITY TURBO CHARGER
To achieve the maximum power & torque by lower engine capacity and hence improve fuel efficiency



DK4 ENGINE

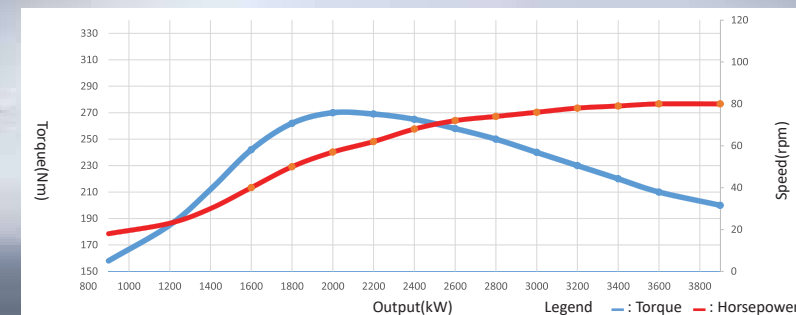

TRANSMISSION		GEAR RATIO					
		1	2	3	4	5	R
2.5L	5 SPEED MANUAL	4.313	2.330	1.436	1.000	0.838	4.220

safety



Head Collision



Rear Collision



Lateral Static Pressure



Rollover Test

Our vehicle has gone through testings which comply with the US Regulation (FMVSS) & European Regulation (UNECE)




Electronic type ABS:

ABS (Anti-lock Brake System) can protect the wheel being locked or slipped to ensure the valid braking under different ground conditions

EBD (ELECTRONIC Brake force distribution):

It can detect, automatically, the load of front and back wheel, rotation differences, or wheel locking by electronic means, and distribute ideal brake forces at proper time.



Monocoque type vehicle body:

1. High-strength swaybars
2. Buffer beams

Dual Air Bag

The purpose of the airbag is to provide a vehicle occupant with soft cushioning and restraint during a collision. It can reduce injuries between the flailing occupant and the interior of the vehicle

*Available in KINGO FULL SPEC only



Specification

KINGO UTE
Standard Spec

KINGO
Full Spec

ENGINE

Engine	DK4
Engine Type	In Line 4 Cylinder, 16-valve, Common Rail Turbocharged With Intercooler, EGR, Diesel Engine
Bore x Stroke	92 x 94
Emission Standard	EURO-IV
Displacement (L)	2.498L
Rated Output (kW(HP)/R.P.M)	85(114)/3800
Max. Torque (N.M/R.P.M)	280 / 1800-2600
Compression Ratio	17.3:1
Top Speed *	135 km/h
Fuel Standard	Diesel
Fuel Tank Capacity (L)	70 Litre

DRIVING SYSTEM

Transmission Type	Manual 5-Speed
Gear Ratio	1st: 4.313, 2nd: 2.330, 3rd: 1.436, 4th: 1.000, 5th: 0.838, Reverse: 4.220
Clutch	Single Disc, Hydraulic Control
Driving Type	Middle Engine, Rear Drive
Brake System	ABS+EBD, Intelligent Brake Assisance System Front Disc & Rear Drum
Suspension	Front Transverse Double Wishbone Independent Suspension, Rear Variable Rate Leaf Spring

TECHNICAL DIMENSION

Overall LxWxH (mm)	5470 x 1885 x 2285
	3110
Ground Clearance (mm)	≤160
Gross Vehicle Weight (kg)	3500
Curb Weight (kg)*	2415
Seating Capacity	15 Seats
Tire	205R/15C
Minimum Turning Radius (m)	≤6.15

FEATURES AND ACCESSORIES

Audio Systems	Display Audio With 7" Touch Screen LCD, MP3, USB, AUX & Bluetooth	
Stereo Speaker	2 pcs	6 pcs
Reverse Camera	•	•
Reverse Sensor	•	•
Cabin Light	•	•
Seat Material	Semi Leather	
Last Row Hanging Seat	•	•
Intermittent Front Wiper, Rear Wiper	•	•
Rear Windscreen with Demister	•	•
Tilttable Steering Wheel	•	•
Central Locking	•	•
Remote Control	-	•
Side Mirror with LED Turning Signal Lamp	•	•
Side Mirror Adjustment	Power	
High-Mounted 3rd Brake Lamp	•	•
Projection Headlamp with DRL	•	•
Front Fog Lamp	•	•
Wheel Size	15" Steel	15" Alloy
Air-Conditioner - Front	•	•
Air-Conditioner - Rear	6 Air Vents	6 Air Vents
Rear Evaporator	Double	Double
Middle Console Box with 3 Cup Holder	-	•
Luxury PVC Roof Lining	•	•
PVC Floor Mat	•	•
Power Window - Driver & Co-driver	•	•
Anti-Glare Rear View Mirror	•	•
Seat Belt	2 Point	3 Point

*Data collected under testing conditions. The final results may differ due to different driving conditions, overall vehicle weight etc.



Busbuilder of the Year 2010



National Technology Center



Exempted from Export Inspection



VCA Certification



TS16949:2009



3C Certification



China Top Brand


KINGO
EVERYTHING A BUSINESS NEEDS

TOUR BUS



BAS
PERSIARAN

FACTORY BUS/SCHOOL BUS



22
MURID-MURID

AMBULANCE



TALL & WIDE
INTERIOR

WHEEL CHAIR VAN



WHEEL CHAIR
LIFT

HEARSE VAN




MUSLIM
HEARSE
VAN


UTILITY VAN



DIMENSION

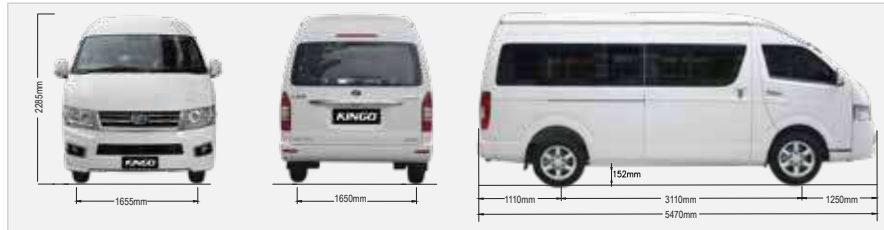

SEATING LAYOUT



15 Seats (2+3+3+3+4)



C.A.M R&A MARKETING SDN BHD

CONSISTENT | ACTIVE | MOBILE Sole Distributor of King Long Minivans

Sendok Group Building, Lot 1564, Batu 4, 42100 Klang, Selangor Darul Ehsan, Malaysia.

Email: info@sendokgroup.com Tel: +603-3345 5600 Fax: +03-3291 9658

Find us on **CAM Malaysia** | www.cammalaysia.com.my

A Member Of **Sendok Group**

Disclaimer: All features & specification shown in this brochure is subject to change without prior notice and may vary according to locality. The color(s) of the vehicle(s) and interior shown here in may slightly differ from actual vehicle.

Branch & Dealer Chop

Think Van, Think CAM

V1_022024